


Power Distribution Unit

Overview

RitchField Power Distribution Units (PDUs) offer cutting-edge power distribution solutions for diverse applications with "E" Series & "I" Series PDUs. The "E" Series, designed for modern data centers and industrial settings, combines precision engineering with advanced technology to provide a comprehensive range of features, optimizing power management, enhancing reliability, and enabling scalability. Whether you're managing a small IT closet or a large-scale data center, the "E-Range" Series PDUs deliver the necessary performance and flexibility. On the other hand, "I" Series PDUs set industry standards in robust and reliable power distribution, tailored for industrial environments. Engineered to excel in the harshest conditions, this series provides industrial facilities with exceptional control, safety, and power management efficiency, making it an ideal choice for manufacturing, heavy industry, and critical infrastructure applications, ensuring uninterrupted operations.

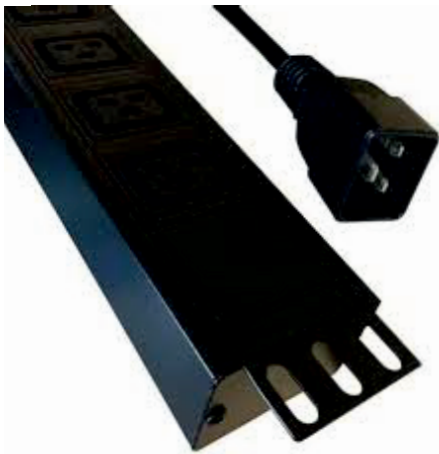

Part Number	RF4-EV-4363-13363-3	RF4-EH-6363-13363S-3	RF4-EH-6993-13363S-3
Series	E-Series	E-Series	E-Series
Socket Type	BS 1363 	BS 1363 	GB2099.3 
Socket Quantity	4	6	6
Power Input	Left end single input	Left end single input	Left end single input
Bracket Install	Inverse installation	Frontal installation	Frontal installation
Cable with plug	BS 1363 13A Plug 	BS 1363 13A Plug 	BS 1363 13A Plug 
Control Function	No controlling function	Lighted master switch	Lighted master switch
Protection Function	No protecting function	No protecting function	No protecting function
Case	Black	Black	Black
Cable Specification	3 x 1.5 mm ² x 3M	3 x 1.5 mm ² x 3M	3 x 1.5 mm ² x 3M
Product Size (L x W x H)	306 x 44.4 x 62 mm	482 x 44.4 x 62 mm	488.8 x 44.4 x 62 mm
Mounting Length	280 mm	454 mm	462.8 mm
Case Length	250 mm	426 mm	432.8 mm
PDU Exponent	0.741	1.057	1.105
Fittings	2pcs ϕ 6 x16mm cross bolt 2pcs M6 float nut	No	2pcs ϕ 6 x16mm cross bolt 2pcs M6 float nut
Rating voltage	250VAC 50/60Hz	250VAC 50/60Hz	250VAC 50/60Hz
Rating Current	13A	13A	13A
Max. Power	3250W	3250W	3250W
Socket assemble	None	None	None
Interior Connection Wire	1.5 mm ² (16AWG)	1.5 mm ² (16AWG)	1.5 mm ² (16AWG)
Interior Connection Style	Standard connection	Standard connection	Standard connection
Fix the Cable	Cable clamp (11)	Small cable clamp	Small cable clamp

Part Number	RF4-EH-6314-13363S-3	RF4-EV-12993-13363-3	RF4-EV-12993-13363S-3
Series	E-Series	E-Series	E-Series
Socket Type	NFC61-314(Socket 2) 	GB2099.3 	GB2099.3 
Socket Quantity	6	12	12
Power Input	Left end single input	Left end single input	Left end single input
Bracket Install	Frontal installation	Inverse installation	Frontal installation
Cable with plug	BS 1363 13A Plug 	BS 1363 13A Plug 	BS 1363 13A Plug 
Control Function	Lighted master switch	No controlling function	Lighted master switch
Protection Function	No protecting function	No protecting function	No protecting function
Case	Black	Black	Black
Cable Specification	3 x 1.5 mm ² x 3M	3 x 1.5 mm ² x 3M	3 x 1.5 mm ² x 3M
Product Size (L x W x H)	483 x 44.4 x 44.4 mm	860.6 x 44.4 x 62 mm	847.6 x 44.4 x 62 mm
Mounting Length	456.5 mm	834.6 mm	791.6 mm
Case Length	430 mm	804.6 mm	432.8 mm
PDU Exponent	0.787	1.805	1.879
Fittings	2pcs $\phi 6$ x16mm cross bolt 2pcs M6 float nut	2pcs $\phi 6$ x16mm cross bolt 2pcs M6 float nut	No
Rating voltage	250VAC 50/60Hz	250VAC 50/60Hz	250VAC 50/60Hz
Rating Current	13A	13A	13A
Max. Power	3250W	3250W	3250W
Socket assemble	None	None	None
Interior Connection Wire	1.5 mm ² (16AWG)	1.5 mm ² (16AWG)	1.5 mm ² (16AWG)
Interior Connection Style	Standard connection	Standard connection	Standard connection
Fix the Cable	Small cable clamp	Cable clamp (11)	Small cable clamp